## SMART SOLUTIONS REFERENCE SUMMARY

150kW , N+1, Tier 2, 27 Racks with Containment

# 

## BENEFITS

SmartAisle™




This reference design utilizes the SmartAisle approach to infrastructure design, an intelligent, row-based solution that simplifies infrastructure design, installation and management and optimizes the efficiency and reliability of your data center. By integrating UPS, power distribution, precision cooling and control technologies, it delivers industry best practices in data center design to deliver an infrastructure that is:

- Efficient
- Economical
- Simplified
- Controllable

This Reference Summary provides you with one example of how Smart Solutions can help achieve efficiency and availability for small to medium data centers. This design optimizes capacity – to ensure you do not oversize a solution, yet are able to scale as IT requirements change. Please refer to our website **www.VertivCo.com** for more Smart Solutions Reference Summaries.

## **Smart Solutions Approach for Data Centers**

Capacity:	150kW
Racks:	(27) 42U 2000mm X 600mm X 1100mm for IT equipment
Density:	5.56kW/rack
Power:	(2) 90kW Liebert® APM™ UPS system
Redundancy:	N + 1
Power Distribution:	Liebert MB Modular Busway, 400 Amp; Liebert MPH™ or Liebert MPX™ rack PDUs
Cooling:	(5) 35kW Liebert CRV™ chilled water, precision cooling systems
Containment:	Cold aisle
Monitoring and Control:	Liebert Nform ${}^{\rm \tiny M}$ monitoring; Liebert ${}^{\rm \tiny \otimes}$ iCOM ${}^{\rm \tiny TM}$ Controls for power and cooling
Warranty:	1 year parts and labor

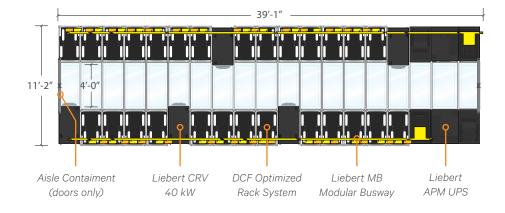

## **Options available:**

Racks:	11–28
Redundancy:	N / N+1
Voltages:	208v / 230v 3-phase or 460v 3-phase
Containment:	Full with standard roof; Full with fusible links roof; Doors only; No containment
Monitoring and Control:	Avocent DCP, DSView, Rack Power Manager
Warranty:	Extended warranties available
Density Range:	5kW-14kW / Rack
Cooling Type:	Air, Chilled Water



### Solutions Design 150kW 27 Racks with Containment

#### KEY TECHNOLOGIES

Liebert® CRV™	
Precision Cooling	

- 40kW capacity
- Variable capacity Digital Scroll Compressor continuously adjusts airflow to rack temperatures, using up to 35% less cooling energy
- EC Fans use 10-30% less energy than average standard AC motor

Easily separates hot and cold air, increasing return air temperature to

- Easy to direct airflow with movable baffles
- Can be serviced in-row

#### Aisle Containment



• 30+% efficiency improvement

cooling units for higher efficiency

Simplify unit, zone and room control

Optimize holistic cooling operation

- Less fan power per kW cooling
- Increases space efficiency and improves airflow
- Easy to install with modular roof and door systems

Enable Liebert CRV precision cooling units to work as a team

Dynamically optimize the control of airflow and cooling within the row

#### Liebert® iCOM™ Enviromental

- Controls
- Liebert APM™ UPS Easy to scale with 15, 30, 45, 60, 75, 90 kW modules and redundant
- System
  - •
- in 15 kW power cores 94% operating efficiency
- Enterprise grade, longer lasting batteries reduce TCO while improving availability

Installs in 15-30% less time and cost compared to using distribution

Liebert MB Modular Busway

- Unerer
- DCF Optimized Rack System



- 42U height
- 600 mm, 800 mm widths

100, 225 and 400A capacities


cabinets, cables and conduit

- 1100 mm, 1200 mm depths
- Improved airflow for cooling efficiency
- Faster moves/adds/changes with tool-less accessories
- Building block for an efficient power and cooling architecture

**Performance Highlights** 

SmartAisle™ technologies result in a superior PUE performance and substantial savings in installation, energy usage and space utilization.

The PUE of a SmartAisle solution is more than 15-25% lower on average than that of a conventionally designed data center with the same capacity.



\*CRV inlet air temperature 75° F. PUE is a measure of how efficiently a computer data center uses its power; specifically, how much of the power is actually used by the computing equipment (in contrast to cooling and other overhead).

For more details on this and other Smart Solutions offerings, please contact your local Vertiv<sup>™</sup> data center infrastructure specialist. Find them on the web or call 800-222-5877, option 4. See more scenario references at: www.VertivCo.com

#### VertivCo.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2017 Vertiv Co. All rights reserved. Vertiv and the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.