



FRONT VIEW

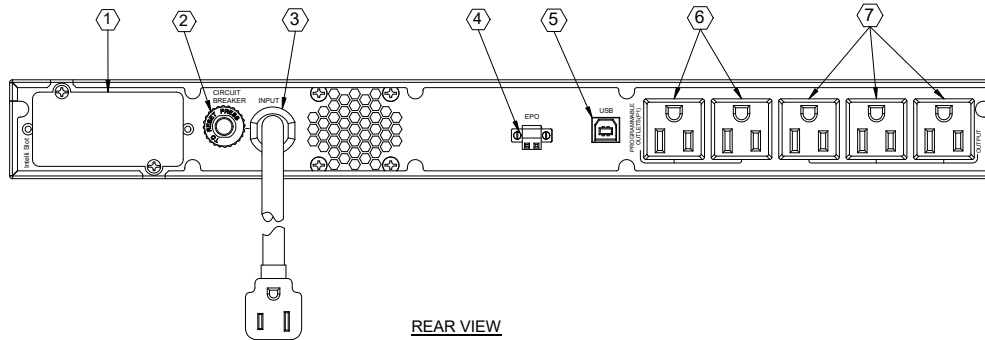

REAR VIEW

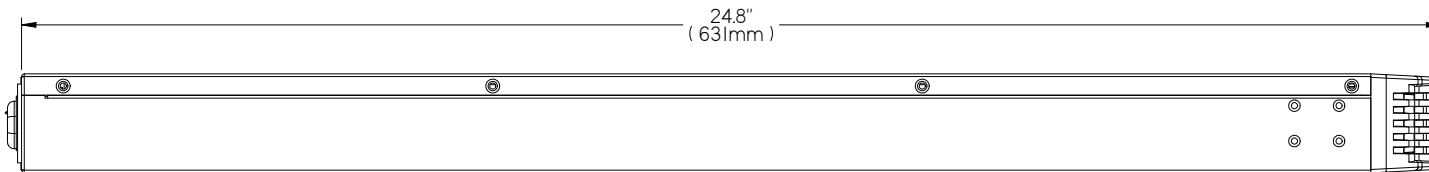

SIDE VIEW

- ① INTELLISLOT PORT. NETWORK COMMUNICATIONS CARD OPTIONAL
- ② 16A INPUT CIRCUIT BREAKER
- ③ INPUT POWER CORD: NEMA 5-15P WITH 10 FOOT ATTACHED CORD
- ④ EPO CONNECTOR
- ⑤ USB PORT
- ⑥ OUTPUT RECEPTACLES: 2 NEMA 5-15R PROGRAMMABLE GROUP
- ⑦ OUTPUT RECEPTACLES: 3 NEMA 5-15R ALWAYS ON
- ⑧ ON/MUTE BUTTON
- ⑨ SELECT BUTTON
- ⑩ OFF/ENTER BUTTON

NOTES:

1. UNIT DIMENSIONS: 17.2" x 24.8" x 1.7" (438mm) x (631mm) x (44mm)
2. UNIT WEIGHT: 45.6LBS (20.7KG)
3. SHIPPING DIMENSIONS: 23.4" x 27.8" x 5.5" (540mm) x (595mm) x (140mm)
4. SHIPPING WEIGHT: 51.1LBS (23.2KG)
5. MINIMUM AIRFLOW CLEARANCE IS 4.0" (100.0mm) - FRONT/REAR
6. FIXED RAIL KIT: INCLUDED.
7. ALL SITE WIRING IS TO BE IN COMPLIANCE WITH NATIONAL AND LOCAL ELECTRIC CODES
8. UNIT INPUT: 100~125 VAC, 60/50HZ, 16A
9. UNIT OUTPUT: 100/110/115/120/125VAC, 60/50HZ, 1500VA/1350W, 12A, @125VAC INPUT OR 1440VA/1350W, 12A, @120VAC INPUT OR 1380VA/1350W, 12A, @115VAC INPUT OR 1275VA/1147W, 11.6A, @110VAC INPUT OR 1200VA/1147W, 12A, @100VAC INPUT

DRAWN BY B. LAY	SHEET NO. 1 OF 1
CHK BY L. JOHNSON	ECN NO.
REF. DWG.	ORDER NO.

PSI5-1500RM1201U

DWG. NO. PSI5-1500RM1201U	DATE 10-14-19	REV. # 0	1050 DEARBORN DRIVE P.O. BOX 29186 COLUMBUS, OHIO 43229
------------------------------	------------------	-------------	---

